



| PRODUCT INFORMATION


Natural fiberboard faced with a specialty engineered wood fiber surface material.

| SIZES AVAILABLE

- 1/2"x48x96

| ADVANTAGES

- A cost effective tackable material made from 98% recycled materials that makes a high performance stable panel
- Its smooth and water resistant surface is excellent for laminating, paint finishes, and fabric wrapping

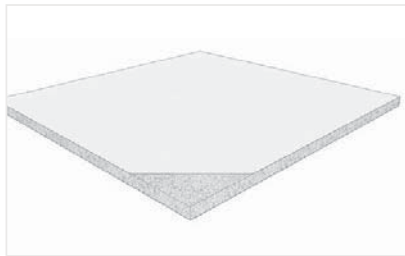

| PRODUCT SPECIFICATION

| TECHNICAL DATA

	MATERIAL THICKNESS				
	1/2"	-	-	-	-
SKIN THICKNESS	0.026"	-	-	-	-
CORE THICKNESS	0.438"	-	-	-	-
MAX SCREW WITHDRAWN FORCE, LBF	20	-	-	-	-
MAX SCREW TENSILE FORCE, LBF	28	-	-	-	-
MAX TENSILE STRENGTH, PSI	7	-	-	-	-
COMP. STRENGTH @5% STRAIN, PSI	22	-	-	-	-
MAX FLEXURE FORCE, LBF	44	-	-	-	-
MODULUS OF RUPTURE, PSI	1160	-	-	-	-
MODULUS OF ELASTICITY, PSI	173178	-	-	-	-
WEIGHT PER PANEL, LB** ( 48 x 96 )	25	-	-	-	-

| PACKAGING QUANTITY PER SKID

SHEET SIZE	MATERIAL THICKNESS				
	1/2"				
4 X 8	96				

\* Testing conducted with Varianta Screw HC 013.30.900

\*\* Actual measured weight may vary due to temperature and humidity. Weight provided is for comparative analysis only

